

B TR RP

B TT

P T PS



The BKR Series Portable Radio offers exceptional performance in a lightweight form factor, incorporating industry-leading RF and electrical specifications in a rugged, submersible housing.

Large, Bright, Color Display a t l a y, o

7 c`cf`8]gd`Um	6-line display 3 customizable display lines of 16 characters 2 lines of status icons 1 line of soft-keys
? YmdUX`	Back-lit with 4 customizable soft-keys
7 \UbbY`7 UdUW]miA Ya cfm`	5000
J <: `	BKR 5000
6i h`cbg`UbX`Gk]hW Yg`	Oversized PTT, On/Off Volume control, orange emergency button, 16 position rotary switch, 4 positions concentric zone switch, 3 programmable side buttons, programmable collar switch


J <: `fi 77#7E`	FCC ID: K95BKR5000-V, IC ID: 2116A-BKR5000V
-----------------	---

: 77`9a]gg]cb`8Yg][bUhcfg`

		J <:
: fYei YbWmF Ub[Y		136-174 MHz
7\UbbY`GdUW]b[25/12.5 kHz
A Ul : fYei YbWmGYdUfUh]cb		Full Band
F UhYX`5i X]c`Ci hdi hDck Yf		3 Watts
5bU`c[`GYbg]hj]lm 8][]hU`GYbg]hj]lm	12dB SINAD 1% BER 5% BER	0.2 μV /-121.0 dBm 0.277 μV /-118.15 dBm 0.2 μV /-121.0 dBm
GY`YW]j]lm	25 kHz 12.5 kHz	80 dB 70 dB
hYfa cXi `Uh]cb		78 dB
Gdi f]ci g`FY`YW]cb		80 dB
: A `ci a `UbX`Bc]gY`	25 kHz 12.5 kHz	50 dB 44 dB
5i X]c`8]g]c]fh]cb`		2%


	VHF
: fYei YbWmF Ub[Y`	136-174 MHz
7\UbbY`GdUW]b[`	25/12.5 kHz
A Ul : fYei YbWmGYdUfUh]cb`	Full Band
F UhYX`F: `Ci hdi hDck Yf: fYei YbWmGHUV]`]lmfl' \$\$7`hc`Ž*\$ \$7`ž` Ž&) \$7`FYZYfYbW]q	1-6 Watts ± 1 ppm
A cXi `Uh]cb`@]a]h]b[`	± 5/2.5 kHz

T T P T

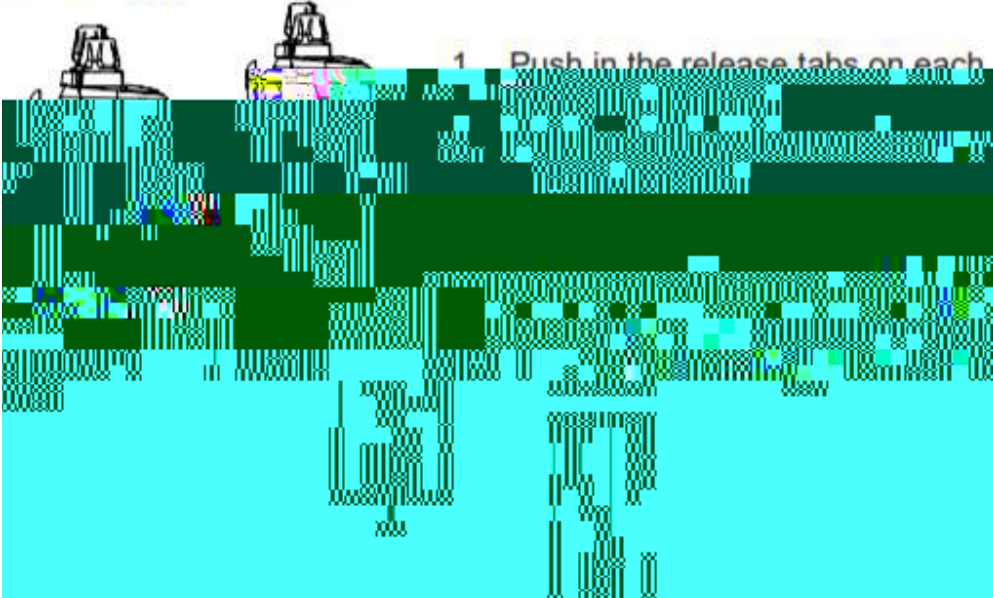

The BKR 5000 display can be programmed for a variety of options and functionality. Check with your Sales Representative or Communications Officer for information on the programmed functions of your radio.

NOTE: The BKR 5000 display can be programmed to display different information when a trunking or conventional channel is missed.

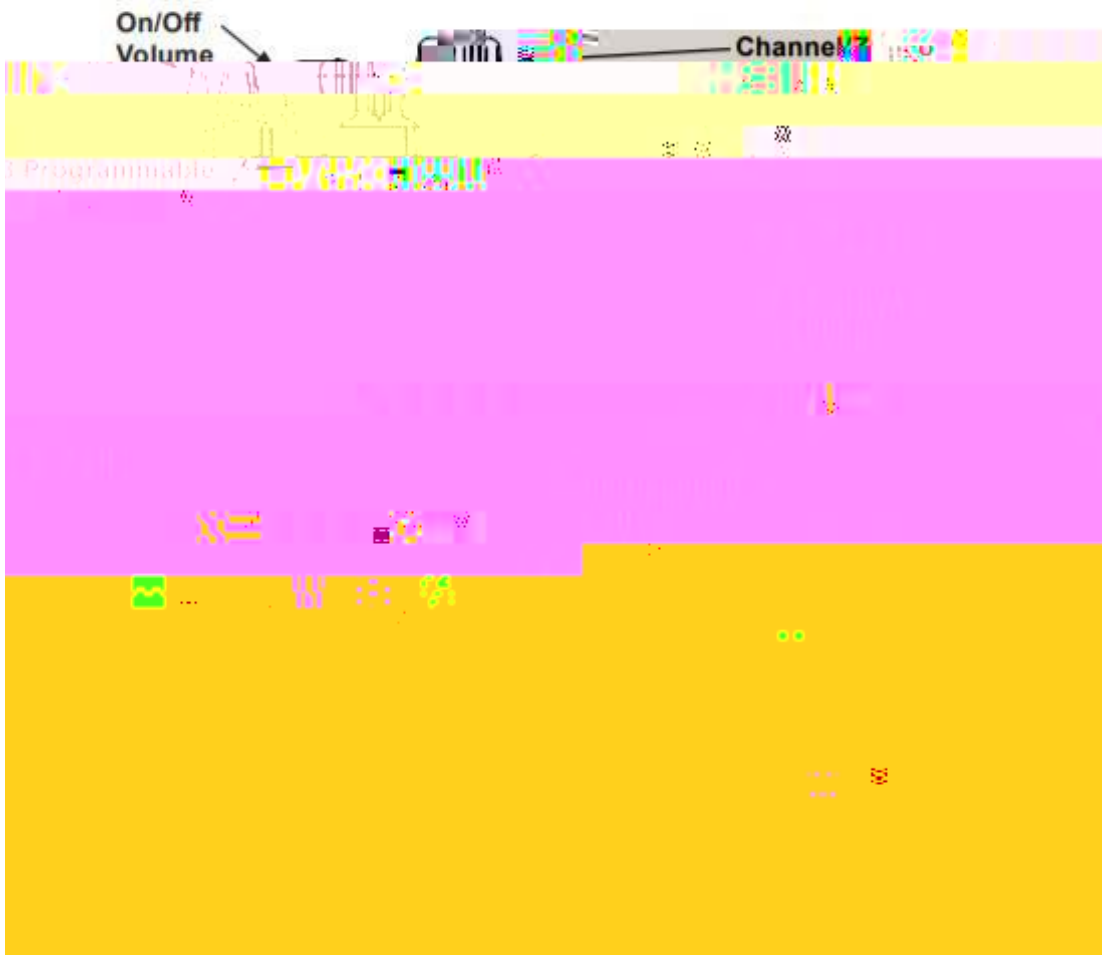

	A @GH8', %\$;	
	A Yh\cX	DfcW'#7 Uh"
@ck 'DfYggi fY'	500.5	I, II
<][\ 'hYa dYfUhi fY'	501.5	I, II
@ck 'HYa dYfUhi fY'	502.5	I, II
HYa dYfUhi fY'G\cW_&		

